
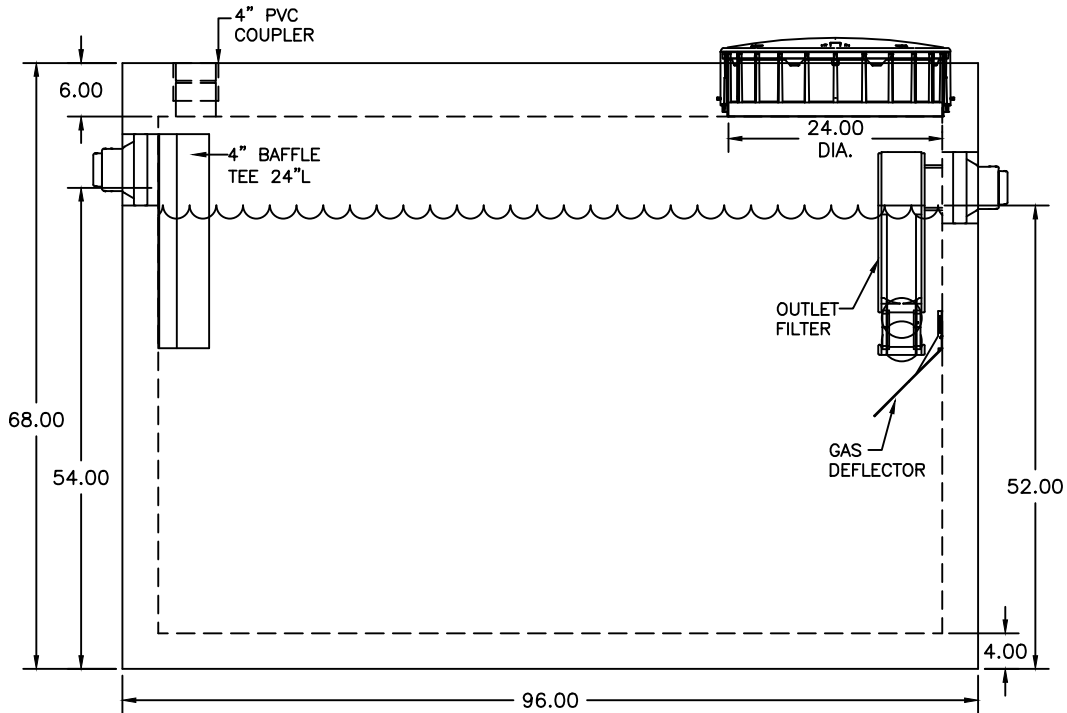


**NOTES:**

1. NON TRAFFIC BEARING – MAXIMUM EARTH COVER 4’.
2. MINIMUM CONCRETE STRENGTH = 4,000 PSI @ 28 DAYS.
3. MEETS REQUIREMENTS OF N.J.A.C. 7:9A
4. REINFORCEMENT: #3 & #4 REBAR IN TOP & BOTTOM, FIBER MIX USED THROUGHOUT.
5. WEIGHT: 6.0 TONS
6. 26.25 GALLONS PER VERTICAL INCH.

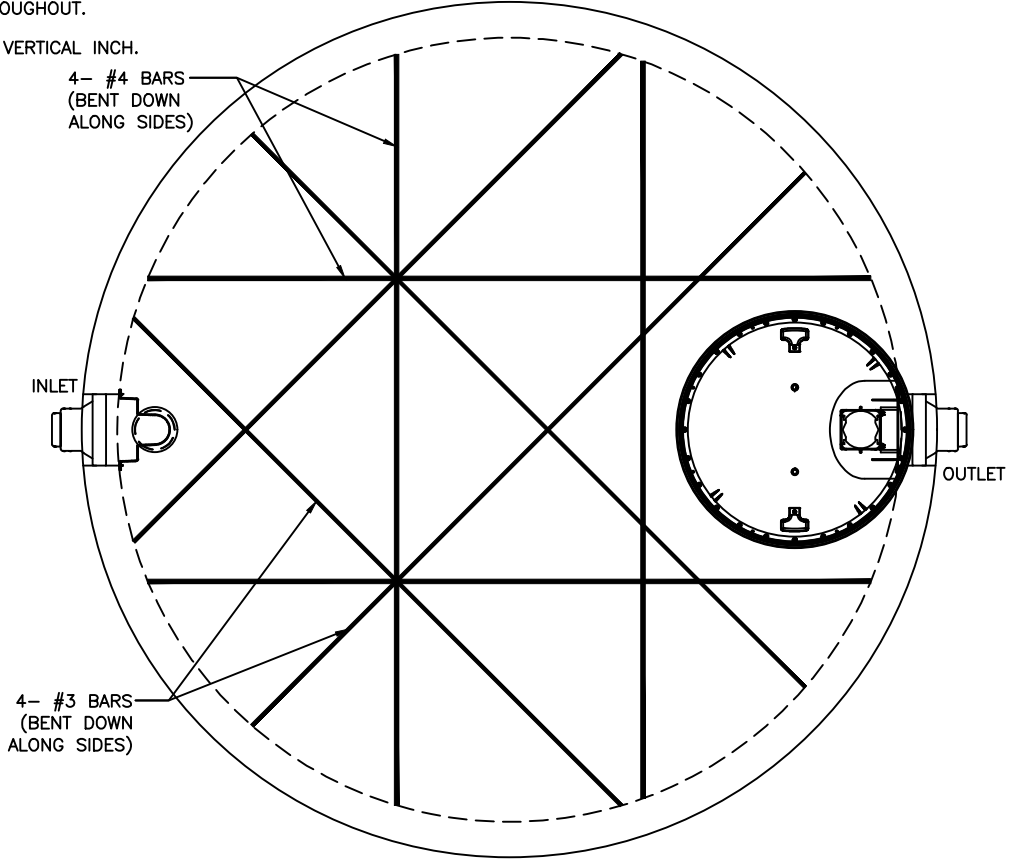

FRANKLIN PRECAST  
20 PARK DRIVE  
FRANKLIN, NEW JERSEY 07416  
www.franklinprecast.com

pH: (973) 827-7563  
Fax: (973) 827-4746  
sales@franklinprecast.com



**DESCRIPTION:** FRANKLIN PRECAST – NON TRAFFIC  
1,250 GAL. ROUND SEPTIC TANK

**SCALE:**  
NOT TO SCALE

**DRAWN BY:**  
AK

**PART #**

1250 GAL.  
NT SEPTIC

**DATE:**  
3/21/2017

**CHECK BY:**  
AY

THIS DRAWING IS THE PROPRIETARY PROPERTY OF FRANKLIN PRECAST. REPRODUCTION, DISCLOSURE OR USE OF ANY PART OF THIS DRAWING OR ANY INFORMATION THEREIN IS EXPRESSLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF FRANKLIN PRECAST.