
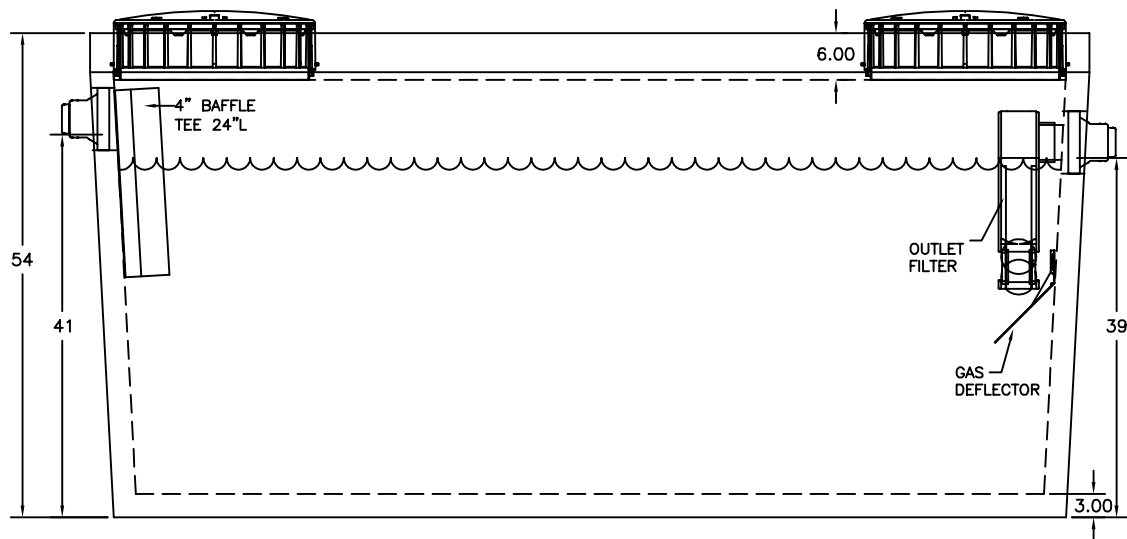


NOTES:

1. NON TRAFFIC BEARING - MAXIMUM EARTH COVER 4'.
2. MINIMUM CONCRETE STRENGTH = 4,000 PSI @ 28 DAYS.
3. MEETS REQUIREMENTS OF N.J.A.C. 7:9A
4. REINFORCEMENT: #3 & #4 REBAR @ 12" OCEW IN TOP & BOTTOM, 6/6 10GA. WIRE MESS IN SIDES
5. WEIGHT: TANK= 5 TONS & LID= 2.2 TONS
6. 29 GALLONS PER VERTICAL INCH.

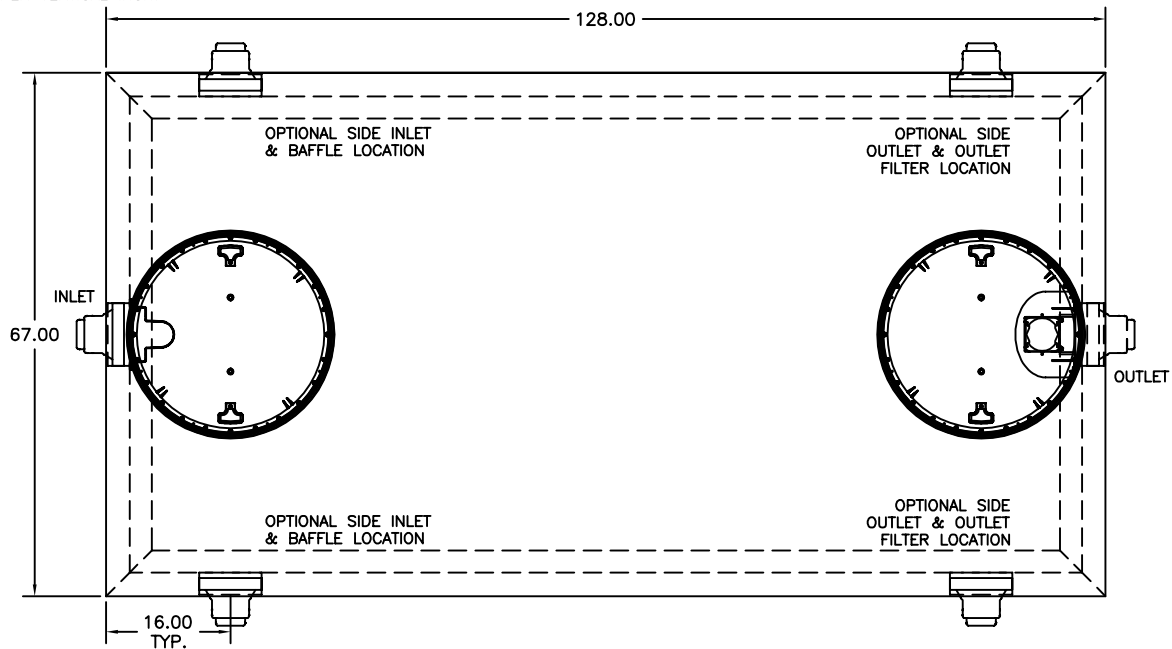

FRANKLIN PRECAST
 20 PARK DRIVE
 FRANKLIN, NEW JERSEY 07416
 www.franklinprecast.com

pH: (973) 827-7563
 Fax: (973) 827-4746
 sales@franklinprecast.com



DESCRIPTION: FRANKLIN PRECAST - NON TRAFFIC 1,250 GAL. NT SEPTIC TANK		
SCALE:	NOT TO SCALE	DRAWN BY: AK
DATE:	3/21/2017	CHECK BY: AY
		PART # 1000 GAL. NT LoBoy

THIS DRAWING IS THE PROPRIETARY PROPERTY OF FRANKLIN PRECAST. REPRODUCTION, DISCLOSURE OR USE OF ANY PART OF THIS DRAWING OR ANY INFORMATION THEREIN IS EXPRESSLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF FRANKLIN PRECAST.